



Rough Terrain Self-Propelled Scissor Lift

GS™-3384 RT

- The ultimate scissor lift for narrow, rough terrain applications.



Genie Industries

GS-3384 RT

- Large platform with **durable diamond-plate aluminium flooring**. Both the single 1.52m (60in) multi-position slide-out extension deck, on the front of the machine and the second 1.22 m (48 in) slide-out extension deck, on the rear of the machine, are standard.
- Slide-out engine tray allows **easy access to components**.
- **Automatic leveling hydraulic outriggers**

Standard Features


- 12.1 m (39 ft) working height
- 1,134 kg (2,500 lb) platform capacity
- 7.30m extended deck
- Front and back platform extensions decks
- Automatic leveling hydraulic outriggers
- Positive traction-control
- 42% gradeability
- Proportional drive
- Powered by Deutz Diesel engine
- Slide-out engine tray for easy maintenance
- Foam-filled tyres
- Hydraulic oil cooler
- AC wiring to platform
- Descent alarm
- Tilt sensor with an audible alarm
- Horn
- Hour meter

Options and Accessories

- High floatation tyre package

Standards Compliance

- CE EN280

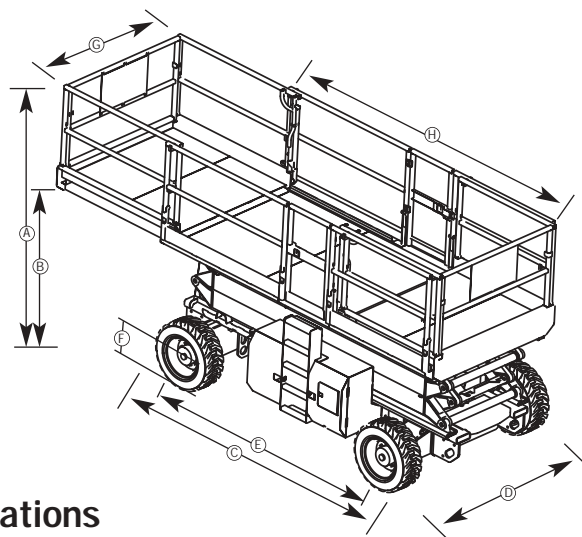

Specifications

Model	GS-3384 RT	
	Metric	US
Working height*	12.1 m	39 ft
Platform height	10.1 m	33 ft
(A) Height - stowed		
guardrails	2.68 m	105.5 in
guardrails lowered	2 m	78.75 in
(B) Height - stowed (platform)	1.55 m	61 in
(C) Length		
stowed	3.98m	156.1/2 in
stowed-w/outriggers	4.88 m	192 in
(D) Width-standard tyres	2.13 m	84 in
(E) Wheelbase	2.88 m	113.5 in
(F) Ground clearance	33 cm	13 in
(G) Platform width	1.83 m	72 in
(H) Platform length		
Lift capacity	1,134 kg	2,500 lb
Extension deck capacity (max)	227 kg	500 lb
Turning radius - outside	5.94 m	234 in
Turning radius - inside	3.09 m	121.5 in
Power source	Deutz Diesel F3L 1011 27 kw (36 hp), air cooled	
Auxiliary power unit	12 volt DC	
Drive speed - stowed	6.4 km/h	4 mph
Drive speed - raised	1.1 km/h	0.7 mph
Raise/lower speed	45/29 sec	
Tyres - rough terrain	25.4 cm x 41.9 cm	10 in. x 16.5 in
Gradeability (4x4)	42%	42%
Self-levelling capability w/outriggers		
side/side	13°	13°
front/rear	7°	7°
Hydraulic tank capacity	75.7 litre	20 gal
Fuel tank capacity	75.7 litre	20 gal
Weight**	6,336 kg	13,968 lb

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Weight will vary depending on options and/or country standards.

Distributed By:

Genie Industries

GENIE UNITED KINGDOM

The Maltings, Wharf Road
 Grantham
 Lincolnshire NG31 6BH
 England
 Telephone: +44 (0)1476 584333
 Fax: +44 (0)1476 584334
<http://www.genielift.com>

GENIE UNITED STATES

18340 NE 76th Street
 P.O. Box 97030
 Redmond, Washington 98073-9730
 Telephone +1 (425) 881 1800
 Fax +1 (425) 883 3475
<http://www.genielift.com>